

SPECIFICATION / SPESIFIKASI / 规格

Properties / Kandungan / 特性	MS EN 197-1:2014 CEM II / B-M 32.5N
Sulphuric Anhydride, SO ₃ (%) <i>Kandungan Sulfat, SO₃ (%)</i> 三氧化硫含量, SO ₃ (%)	≤ 3.5
Chloride Content, Cl (%) <i>Kandungan Klorida, Cl (%)</i> 氯离子含量, Cl (%)	≤ 0.01
Initial Setting Time (minutes) <i>Masa Penetapan Permulaan (minit)</i> 初凝时间 (分钟)	≥ 75
Soundness (Expansion) (mm) <i>Kekukuhan (Pengembangan) (mm)</i> 稳健性 (膨胀) (mm)	≤ 10
Compressive Strength / <i>Kekuatan Mampatan</i> / 抗压强度 7 days / <i>hari</i> / 天 (N/mm ²) 28 days / <i>hari</i> / 天 (N/mm ²)	≥ 16 32.5 – 52.5

Specification of product is subjected to manufacturer's change without prior notice.
Spesifikasi produk adalah tertakluk pada perubahan oleh pengeluar tanpa notis awal.
厂商有权更改产品规格, 无需另行通知。

PACKAGING / PEMBUNGKUSAN / 包装

50kg bag / Beg 50kg / 50公斤包装

Tasek Corporation Berhad

HEAD OFFICE & FACTORY

Lot 5, Persiaran Tasek, Tasek Industrial Estate,
31400 Ipoh, Perak, Malaysia
Tel: +605 290 9000
Fax: +605 291 9932

✉ info@tasek.com.my

SALES AND MARKETING OFFICE & DISTRIBUTION TERMINAL

Lot 1552, Kg. Jaya Industrial Area, Off Jalan Hospital,
47000 Sungai Buloh, Selangor, Malaysia
Tel: +603 6156 6818

✉ marketing@tasek.com.my




SIRIM
MS EN 197-1 : 2014
PC010954



www.tasek.com.my

TERRAPRIME®

PORTLAND-COMPOSITE CEMENT

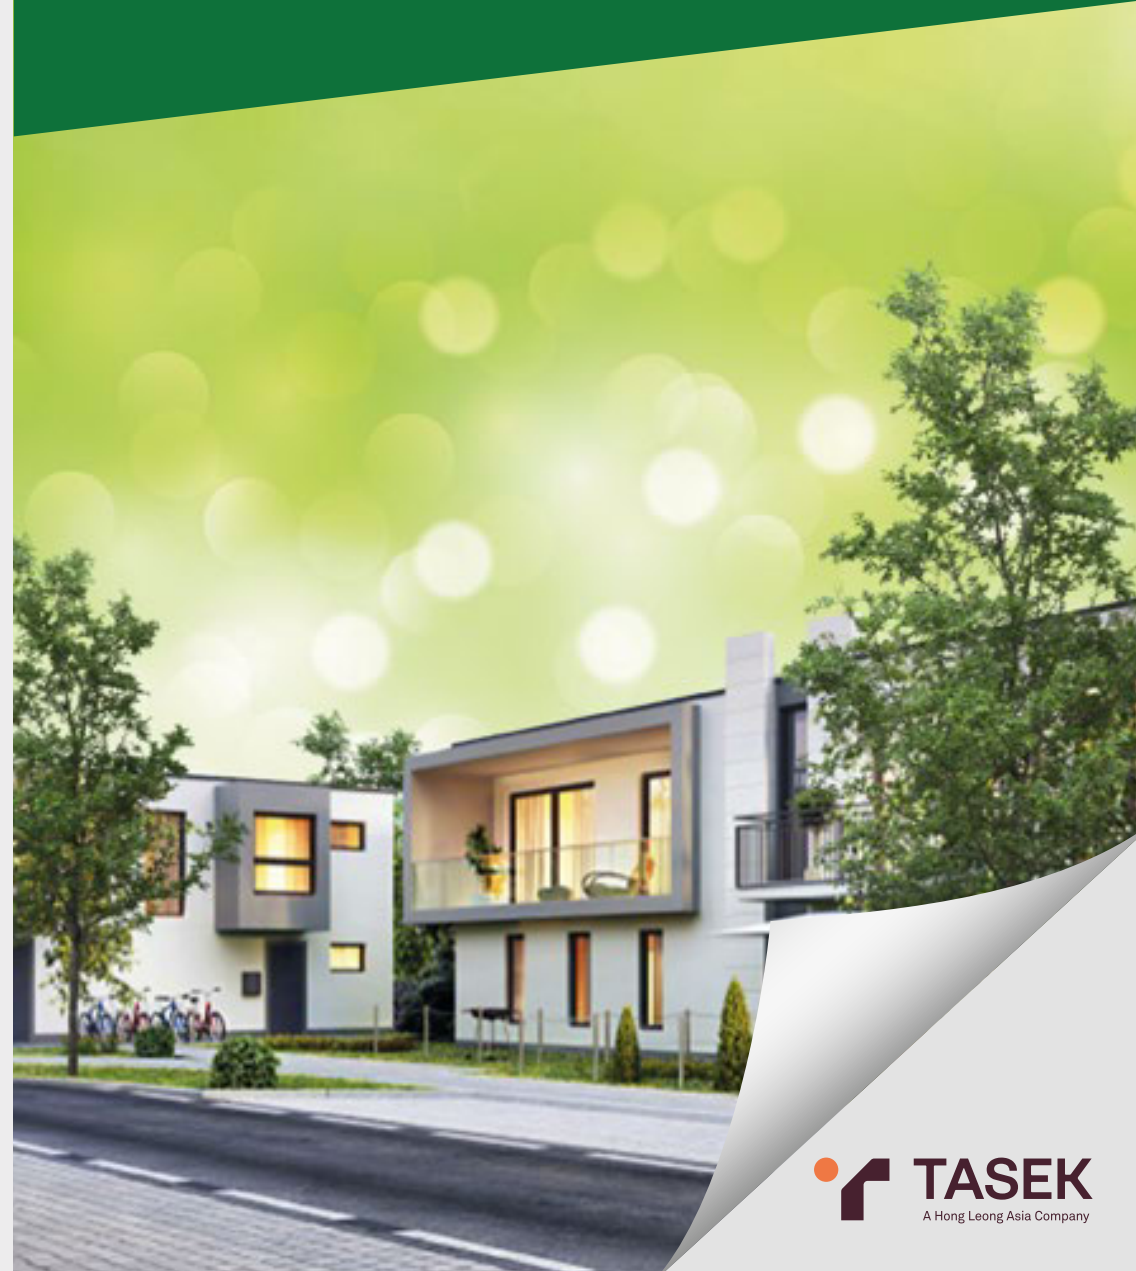

 **TASEK**
A Hong Leong Asia Company



TERRAPRIME®

PORTLAND-COMPOSITE CEMENT

TERRAPRIME® is manufactured by grinding high-quality Portland cement clinker with other selected cementitious materials. This high performance cement is specially formulated to achieve the required strength with better workability for general purpose application and it complies with MS EN 197-1:2014.

TERRAPRIME® adalah jenis komposit simen yang dihasilkan dengan mencampur klinker simen Portland dan bahan-bahan campuran simen yang terpilih. Simen ini dirumus khas untuk mencapai kekuatan dengan kebolehan kerja yang sesuai untuk semua kegunaan. Ia menepati piawaian yang ditetapkan oleh Standard Malaysia MS EN 197-1:2014.

TERRAPRIME® 是大石公司生产的复合水泥。它采用了水泥熟料和高品质的混合材料特制而成，以确保产品的优良品质。TERRAPRIME® 复合水泥拥有持久强度和提工作性，并适用于一般用途。它符合马来西亚标准局MS EN 197-1:2014的标准和规格。

Applications / Penggunaan / 产品用途

- For all general purpose usage / Sesuai untuk semua kegunaan / 多功能水泥，适用于一般用途
- Bricklaying / Penerapan batu-bata / 砌砖
- Concreting / Membuat konkrit / 混凝土
- Plastering / Penampalan plaster / 抹灰
- Tiling / Kerja pemasangan jubin / 瓦工

Advantages / Kelebihan / 产品优点

- Improved workability / Meningkatkan kebolehankerjaan / 提高工作性
- Improved cohesiveness Meningkatkan daya kelekatan / 增强粘合力
- Smooth finishing surface Permukaan yang licin / 改进平滑表面
- Reduces Bleeding / Mengurangkan penjujukan / 减少水分流失
- Easy to mix Senang dicampur / 容易拌合

GENERAL PURPOSE CEMENT

